


Specifications

Type			CJX2-09	CJX2-12	CJX2-18	CJX2-25	CJX2-32	CJX2-40	CJX2-50	CJX2-65	CJX2-80	CJX2-95
Rated insulation voltage (Ui)		V	690									
Rated thermal current (Ith)		A	20	20	32	40	50	60	80	80	95	95
Rated operation current (Ie)	AC-3, 380V	A	9	12	18	25	32	40	50	65	80	95
	AC-3, 660V	A	6.6	8.9	12	18	21	34	39	42	49	55
	AC-4, 380V	A	3.5	5	7.7	8.5	12	18.5	24	28	37	41
	AC-4, 660V	A	1.5	2	3.8	4.4	7.5	9	12	14	17.3	21.3
Max. power of 3 phase motor controlled	AC-3, 220V	kW	2.2	3	4	5.5	7.5	11	15	18.5	22	25
	AC-3, 380V	kW	4	5.5	7.5	11	15					

Pic. 3 CJX2-40~95

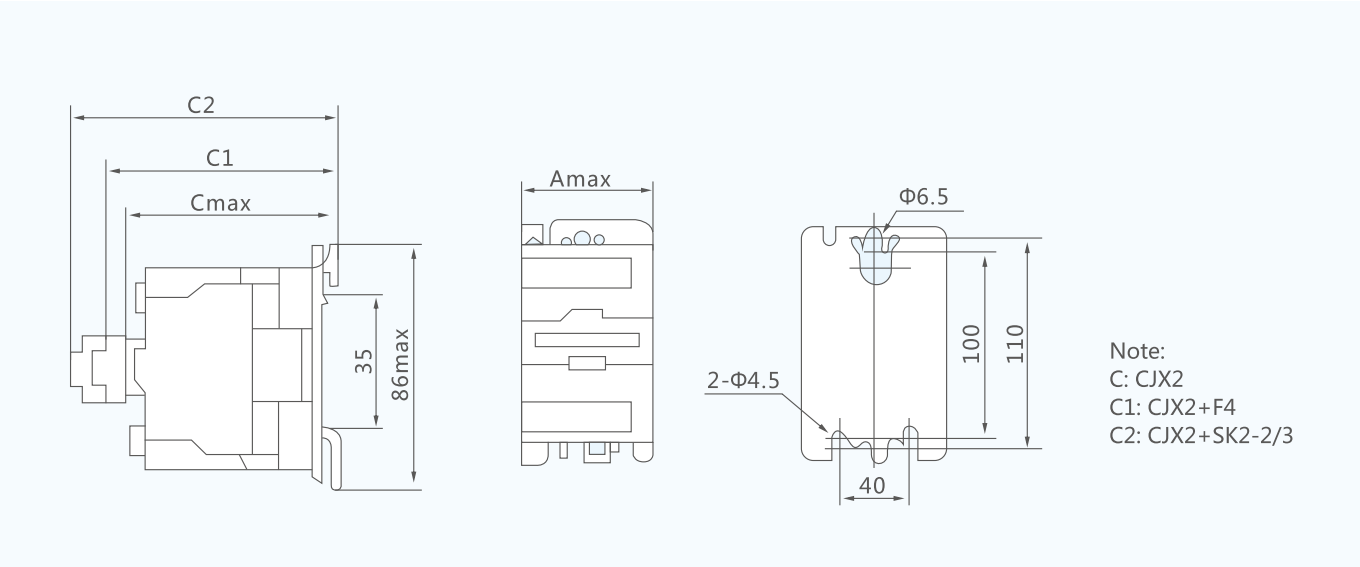

Unit: mm				
Type	Amax	Cmax	C1	C2
CJX2-40,50,65	79	116	149	168
CJX2-80,95	87	127	160	179

Specifications


Ambient temperature	-5°C~+40°C
Altitude	≤2000m
Relative humidity	The maximum temperature of 40 degrees, the air relative humidity not exceed 50%, at a lower temperature can allow for a higher relative humidity, if humidity changes as a result of occasional gel generated,should eliminate it.
Pollution level	3
Installation category	III
Installation position	The installation degree of the tilt and vertical plane should not exceed ±22.5°, should be installed in place with no significant impact shaking and vibration
Installation	The installation of fastening screws can be used,the CJX1-9~38 contactor can also be installed on 35mm standard DIN rail.

LA1-D, LA2-D, LA3-D Contact Block

Type

Overall and mounting dimensions(mm)

CJX2-F115-F330 figure and installation dimension

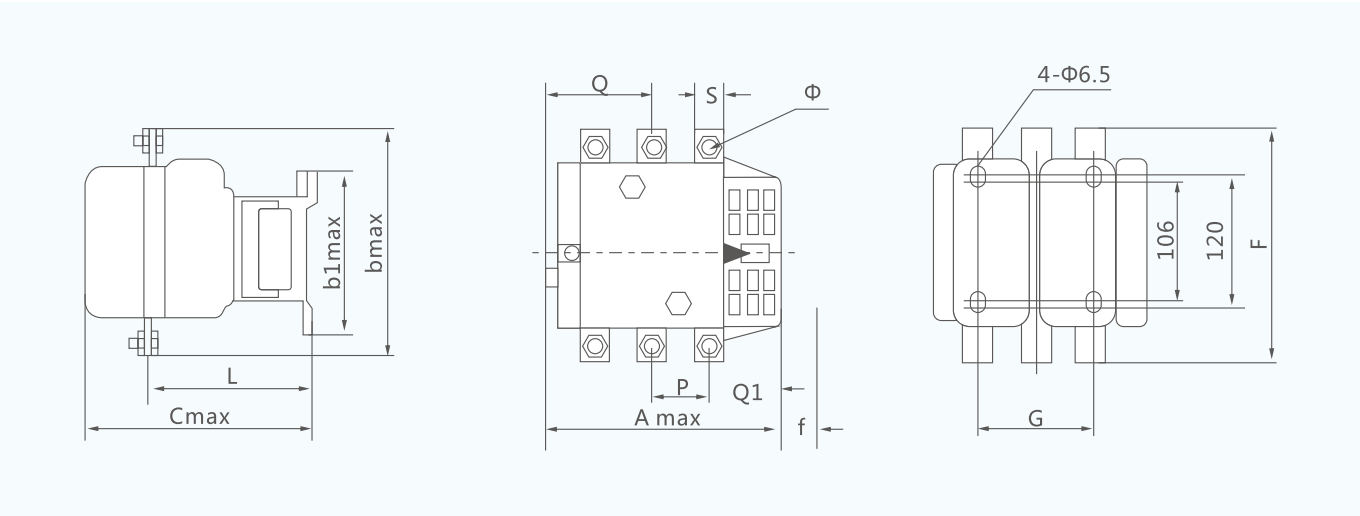

Type	Amax	bmax	b1max	Cmax	G	L	Q	Q1	S	Φ	F	P
CJX2-F115	165	164	137	167	80±0.8	108	29.5	60	15	M6×15	133	37
CJX2-F150	165	172	137	167	80±0.8	108	29.5	57.5	20	M6×20	133	40
CJX2-F185	171	176	137	181	80±0.8	114	30	60	20	M6×20	133	40
CJX2-F225	171	199	137	181	80±0.8	114	22	52	25	M6×30	133	48
CJX2-F265	204	205	145	210	96±1.1	143	39	66.5	25	M10×30	147	48
CJX2-F330	209	209										

